



Search Electronics, Inc.
 113 N. First Ave., Upland, CA, USA
 Phone: 1-909-949-4215 Fax: 1-909-985-8229
www.searchelec.com



UB1222 (12V2.2Ah)

NOTE



PHYSICAL SPECIFICATIONS

Nominal Voltage Nominal Capacity (20HR)		12V 2.2 Ah
Dimensions	Length	178 +/-1mm(7.01 inches)
	Width	35 +/-1mm(1.38 inches)
	Height	62 +/-2mm(2.44 inches)
	Total Height	68 +/-2mm(2.68 inches)
Weight		Approx. 0.93 kg (2.05lbs)
Standard Terminal		F1 – Faston Tab No.170

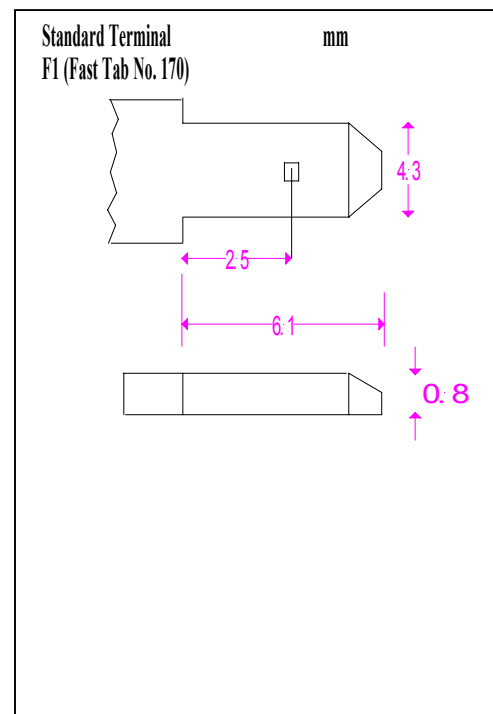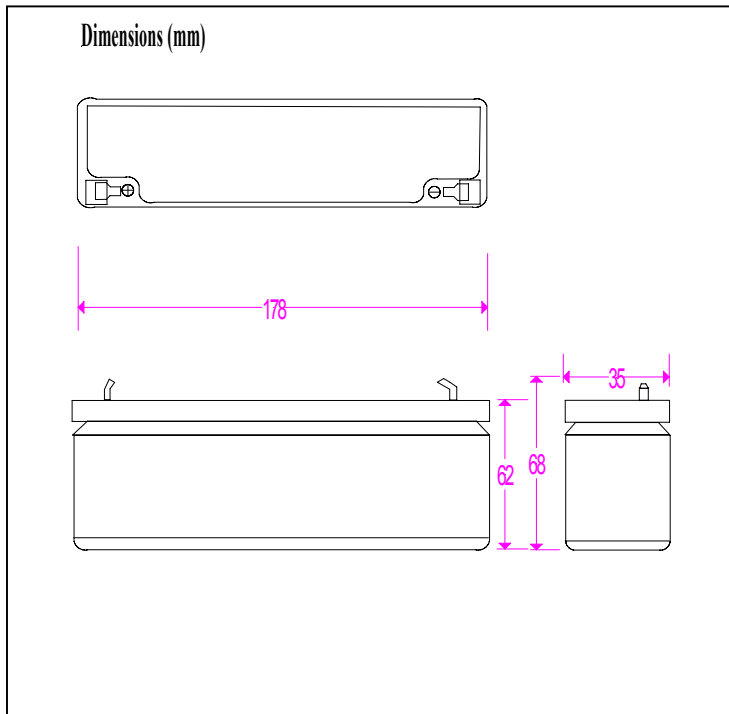



ELECTRICAL SPECIFICATIONS

Capacity	20 hour rate (0.1A)	2.2 Ah	Max. Discharge Current (5 sec.)		20A
	10 hour rate (0.18A)	1.8 Ah	Constant Voltage Charge	Cycle	Initial Charging Current less than 0.6A Voltage 14.40V ~ 15.00V at 20°C(68°F) Temp. Coefficient-30mV/°C
5 hour rate (0.32A)	1.6 Ah				
	1 hour rate (1.2A)	1.2 Ah		Standby	Initial Charging Current less than 0.6A Voltage 13.50V ~ 13.80V at 20°C (68°F) Temp. Coefficient-20mV/°C
Capacity affected by Temperature	40°C(104°F)	105%			
	20°C(68°F)	100%			
	0°C(32°F)	85%			
Internal Resistance Fully charged battery (20°C, 68°F) 90mΩ					

