





Search Electronics, Inc.
 113 N. First Ave., Upland, CA, USA
 Phone: 1-909-949-4215 Fax: 1-909-985-8229
www.searchelec.com

UB1270 (12V7Ah)

NOTE



PHYSICAL SPECIFICATIONS	
Nominal Voltage Nominal Capacity (20HR)	12V 7 Ah
Dimensions	Length Width Height Total Height
	151 +/-1mm(5.94 inches) 65 +/-1mm(2.56 inches) 95 +/-2mm(3.74 inches) 101 +/-2mm(3.98 inches)
Weight	Approx. 2.50 kg (5.50lbs)
Standard Terminal	F1 – Faston Tab No.187

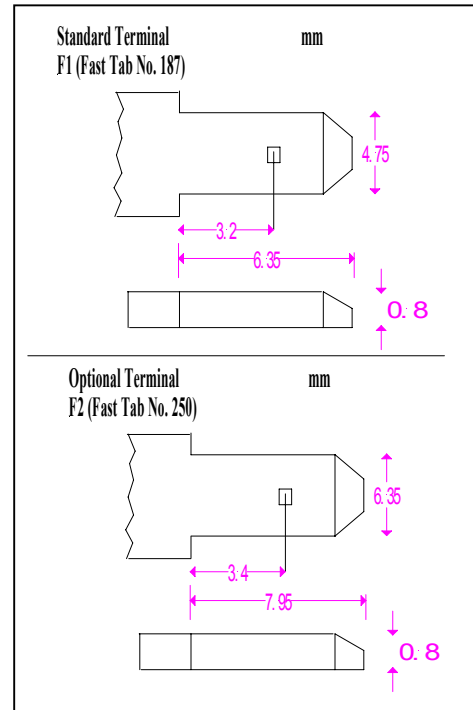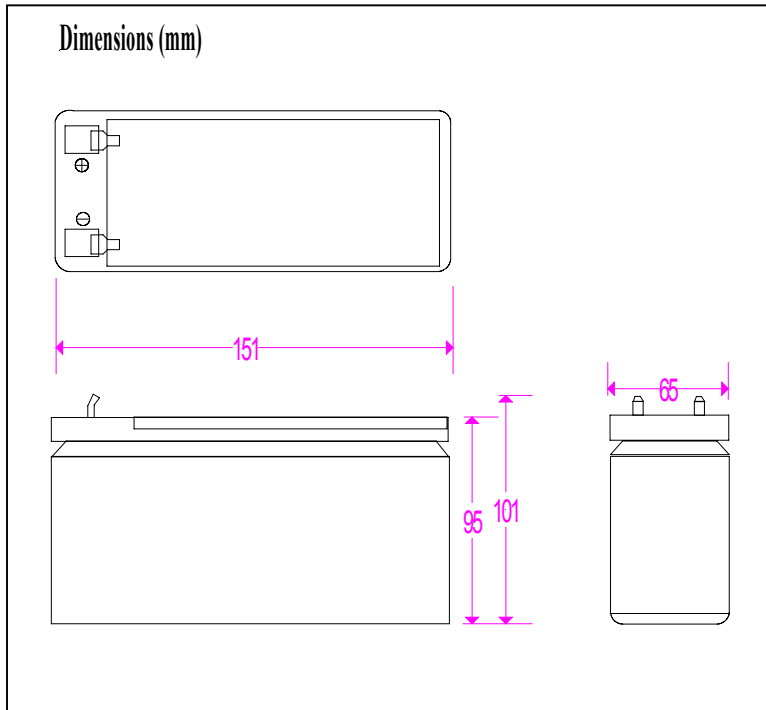



ELECTRICAL SPECIFICATIONS

Capacity	20 hour rate (0.35A)	7 Ah	Max. Discharge Current (5 sec.)		
	10 hour rate (0.63A)	6.3 Ah	Constant Voltage Charge	Cycle	Initial Charging Current less than 2.1A Voltage 14.40V ~ 15.00V at 20°C(68°F) Temp. Coefficient-30mV/°C
5 hour rate (1.12A)	5.6 Ah	Standby			
1 hour rate (4.2A)	4.2 Ah				
Capacity affected by Temperature	40°C(104°F)	105%			
	20°C(68°F)	100%			
	0°C(32°F)	85%			
Internal Resistance Fully charged battery (20°C, 68°F) 35mΩ					

