



**NOTE**




**PHYSICAL SPECIFICATIONS**

Type No.	Approx. Wt. Lbs. (Kgs)	Dimensions In (mm)		
		L	W	H
UB27	62.5	12 3/4 (324)	6 3/4 (171)	9 7/8 (251)

**ELECTRICAL SPECIFICATIONS**

Volts	Terminal	CCA @ 0F	CA @ 32F	Capacity @ 80F	Minutes Discharged at						Ampere Hour Capacity				
					75A	50A	25A	15A	8A	5A	100Hr Rate	20Hr Rate	6Hr Rate	3Hr Rate	1Hr Rate
12	L2	505	700	160	40	70	170	300	605	1000	98	86.4	76.0	69.8	57.0

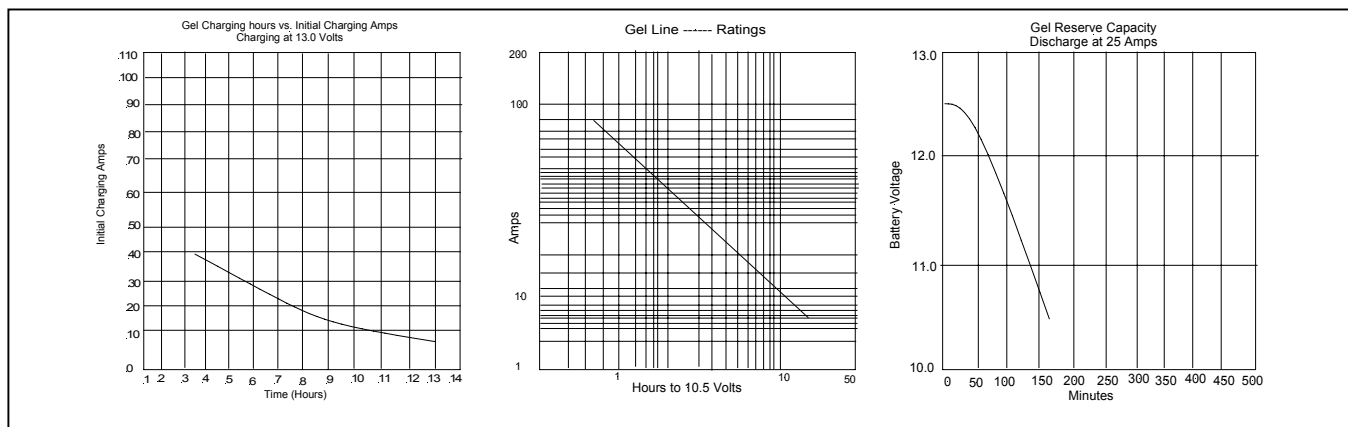

**Terminals:**

- A (Automotive Post)
- Z (Automotive Post with hole to accept thru bolt) in two heights: Short & Long.
- L1 ("L" Terminal with clearance hole to accept 1/4" thru bolt)
- L2 ("L" Terminal with clearance hole to accept 5/16" thru bolt)
- L3 ("L" Terminal with clearance hole to accept 3/8" thru bolt, terminal height 1.2")
- L4 ("L" Terminal with clearance hole to accept 3/8" thru bolt, terminal height 1.5")
- C (Marine Combo terminal: Automotive Post and stud 5/16")
- S (Stud 3/8")
- F (Marine Flag terminal to accept 3/8" thru bolt)