





Search Electronics, Inc.
 113 N. First Ave., Upland, CA, USA
 Phone: 1-909-949-4215 Fax: 1-909-985-8229
www.searchelec.com

UB670 (6V7Ah)

NOTE



PHYSICAL SPECIFICATIONS	
Nominal Voltage Nominal Capacity (20HR)	
6V 7.0 Ah	
Dimensions	Length
	Width
	Height
	Total Height
151 +/-1mm(5.94 inches) 34 +/-1mm(1.97 inches) 95 +/-2mm(3.70 inches) 101 +/-2mm(3.94 inches)	
Weight	
Approx. 1.3 kg (2.88lbs)	
Standard Terminal	
F1 – Faston Tab No.187	

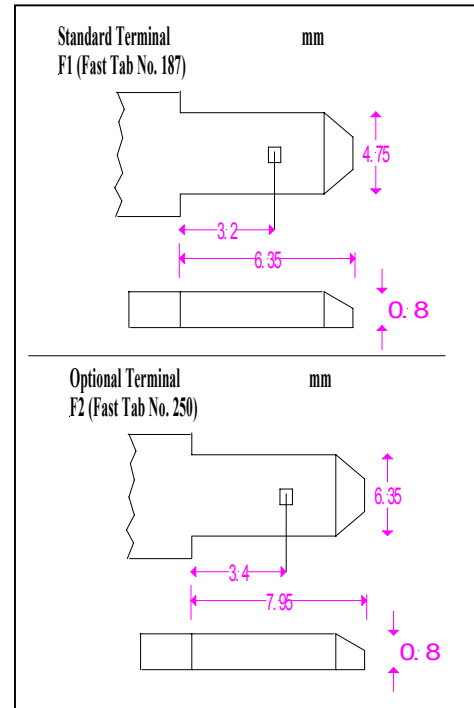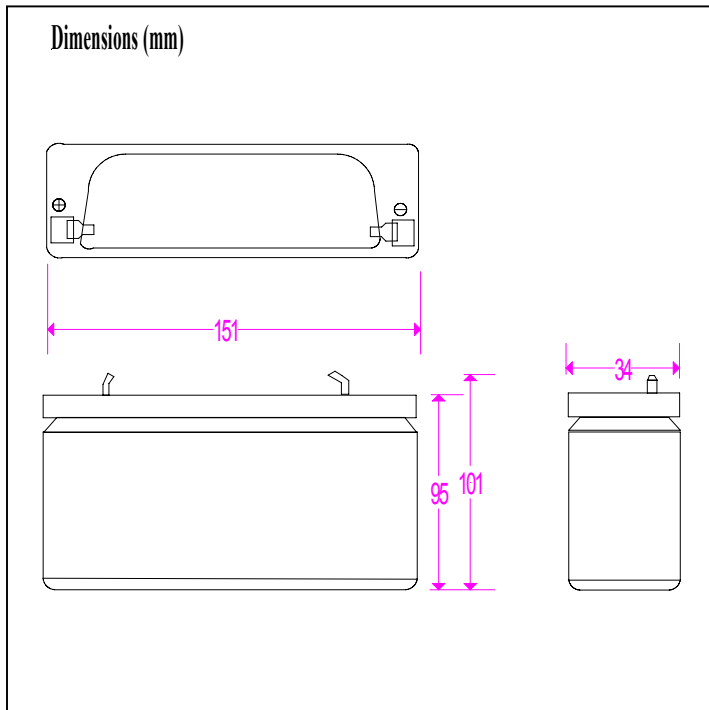



ELECTRICAL SPECIFICATIONS

Capacity	20 hour rate (0.35A)	7 Ah	Max. Discharge Current (5 sec.)	70A	
	10 hour rate (0.63A)	6.3 Ah		Cycle	Initial Charging Current less than 2.1A Voltage 7.20V ~ 7.50V at 20°C(68°F) Temp. Coefficient-15mV/°C
Capacity affected by Temperature	5 hour rate (1.12A)	5.6 Ah	Constant Voltage Charge		Standby
	1 hour rate (4.2A)	4.2 Ah			
Internal Resistance Fully charged battery (20°C, 68°F) 35mΩ					

